

<b>A B</b>	<b>19 FEV 99</b>	<b>Mise à jour / Update</b>	<b>ZANIER</b>		<b>SAMMAN</b>		
<b>A A</b>	<b>16 DEC 98</b>	<b>Edition originale / first issue</b>	<b>ZANIER</b>	<b>FZA</b>	<b>SAMMAN</b>	<b>SMN</b>	
Ind / Rev	Date / Date	Modification / Modification	Nom / Name	Visa	Nom / Name	Visa	Archiv./ microfil.
			Préparé / Issued by		Vérifié / Checked by		
Projet / Projet : <b>Lego</b>			<b>RS232 CORD</b>				
Dossier / Folder : <b>CABLERS232_A</b>							
<b>U</b>		Code diff./ Distrib. code :					
		Unité / Department : <b>ST</b>	<b>5 1, 0 3 4, 1 8 0 W B</b>			Ind/Rev <b>AB</b>	Folio/Sheet <b>1/2</b>

**1 - general features**

cable and connectors are shielded together

all materials must be UL

cable must be marked UL

cable section is 0.125mm<sup>2</sup> / AWG26


length is 1200mm

Sub D 9 connector is female and must have screws ; metallic body must be linked to cable shield


RJ 12 connector is a modular J 6P 4C shielded

**2 - mechanical features ( front view )**


Sub D 9 :

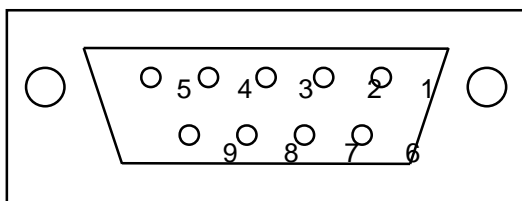

RJ 12 :

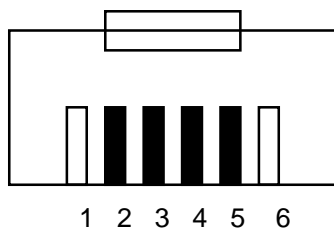

CABLE :

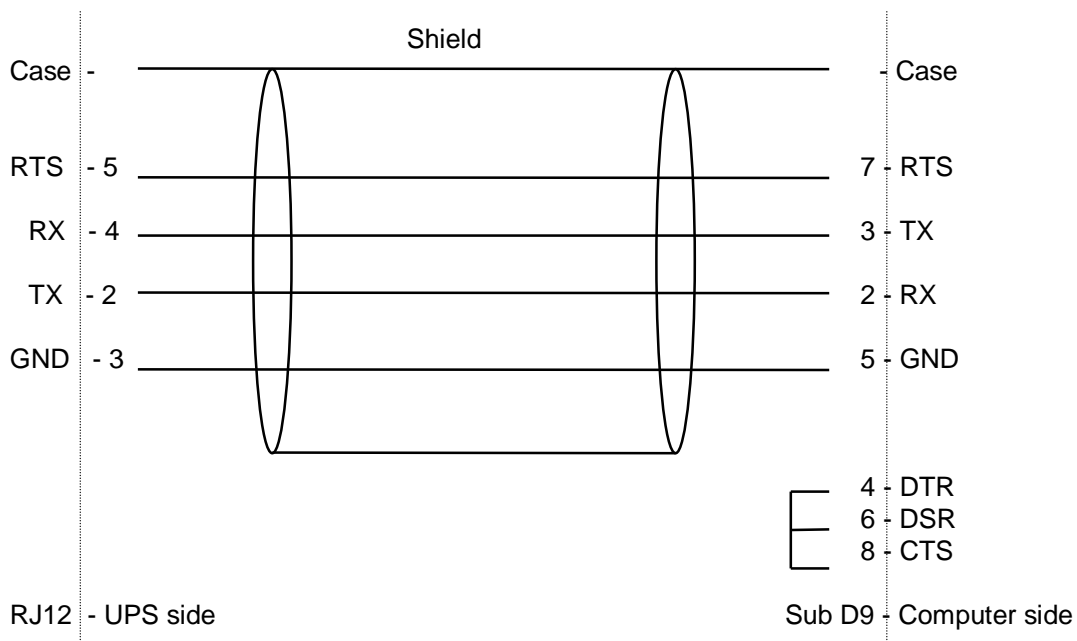

**RS232 CORD**



5 1, 0 3 4, 1 8 0 W B

Ind/Rev Folio/Sheet

AB

2/2