



SHENZHEN LEAD OPTO-TECHNOLOGY CO.,LTD
Add:No.26 building,Putian Road,Bainikeng,Pinghu Town,Shenzhen City,China

Contact Lead: Tel +86-755-8466 0522; Fax +86-755-8466 0122

Website:www.lead-lighting.com Expire date:2013-03-31

T8-LED Tube Series

(Promotional)

CL1—LED Type: SMD3014, AC90-260V input,Beam:>120°, 2 years warranty,CE/ROHS Standard— (Elliptical)

Part No.	Length	Input Voltage	LED Type	LED Qty	Power	Average Output Lumens	Package		Price (USD/PCS)	
							Size(mm)	Weight	<2000	≥ 2000
LD-TL-T8-CL1-8W	60cm	AC90-260V	SMD3014	72	8W	680LM	1250x200x210 50pcs/ctn	17kgs/ctn	\$7.90	\$7.70
LD-TL-T8-CL1-10W	60cm	AC90-260V	SMD3014	88	10W	850LM	1250x200x210 50pcs/ctn	17kgs/ctn	\$8.30	\$8.15
LD-TL-T8-CL1-14W	90cm	AC90-260V	SMD3014	132	14W	1190LM	950x215x210 25pcs/ctn	14kgs/ctn	\$10.50	\$10.30
LD-TL-T8-CL1-14W-120	120cm	AC90-260V	SMD3014	120	14W	1190LM	1250x200x210 25pcs/ctn	16kgs/ctn	\$11.10	\$10.90
LD-TL-T8-CL1-16W	120cm	AC90-260V	SMD3014	150	16W	1360LM	1250x200x210 25pcs/ctn	16kgs/ctn	\$11.70	\$11.50
LD-TL-T8-CL1-20W	120cm	AC90-260V	SMD3014	176	20W	1700LM	1250x200x210 25pcs/ctn	16kgs/ctn	\$12.60	\$12.40

CL2—LED Type: SMD3014, AC180-260V input,Beam:>120°, 2 years warranty,CE/ROHS Standard— (Elliptical)


Part No.	Length	Input Voltage	LED Type	LED Qty	Power	Average Output Lumens	Package		Price (USD/PCS)	
							Size(mm)	Weight	<2000	≥ 2000
LD-TL-T8-CL2-9W	60cm	AC180-260V	SMD3014	80	9W	720LM	1250x200x210 50pcs/ctn	17kgs/ctn	\$6.20	\$6.05
LD-TL-T8-CL2-12W	90cm	AC180-260V	SMD3014	120	12W	960LM	950x215x210 25pcs/ctn	14kgs/ctn	\$7.70	\$7.55
LD-TL-T8-CL2-18W	120cm	AC180-260V	SMD3014	164	18W	1440LM	1250x200x210 25pcs/ctn	16kgs/ctn	\$8.40	\$8.20

CL3—LED Type: SMD2835,Beam:>150°,AC 220±20V input, 2 years warranty,CE/ROHS Standard— (roundness)

Part No.	Length	Input Voltage	LED Type	LED Qty	Power	Average Output Lumens	Package		Price (USD/PCS)	
							Size/CTN(mm)	Weight	<2000	≥ 2000
LD-TL-T8-CL3-8W	60cm	AC220±20V	SMD2835	80	8W	>700LM	660x280x470 55pcs/ctn	12kgs/ctn	\$6.40	\$6.20
LD-TL-T8-CL3-12W	90cm	AC220±20V	SMD2835	120	12W	>1000LM	950x240x180 20pcs/ctn	8kgs/ctn	\$9.80	\$9.00
LD-TL-T8-CL3-12W-120	120cm	AC220±20V	SMD2835	120	12W	>1000LM	1250x240x180 20pcs/ctn	8.5kgs/ctn	\$9.80	\$9.00
LD-TL-T8-CL3-16W	120cm	AC220±20V	SMD2835	160	16W	>1350LM	1250x240x180 20pcs/ctn	8.5kgs/ctn	\$9.80	\$9.00
LD-TL-T8-CL3-20W	120cm	AC220±20V	SMD2835	200	20W	>1650LM	1250x240x180 20pcs/ctn	8.8kgs/ctn	\$12.80	\$11.80
LD-TL-T8-CL3-20W-150	150cm	AC220±20V	SMD2835	200	20W	>1650LM	1550x240x180 20pcs/ctn	9kgs/ctn	\$13.20	\$12.40

Specifications:

- 1, LED source: Epistar SMD3014/2835
- 2, Efficiency: >90%,Rendering Index : >75
- 3, Beam Angle: >120°(Clear Cover)
- 4,Dimmable available, Motion sensor available, Adjusting rotatable base available
- 5, Color Temperature: 2800~3200K, 5500~6500K, 6000~7000K,4000K available
- 6, Aluminum Housing Cover: Silver Aluminum body+Milky / Clear Cover
- 7, Life Span: 40,000~50,000 hours

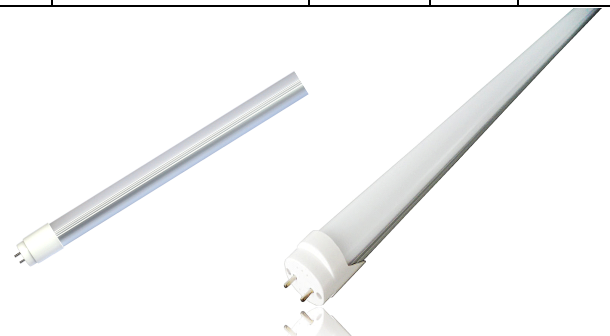

CL3

CL1/CL2

Installation Guide:

- 1, Installation: Before installing, remove the ballast and starter, and make sure the circuit for T8 tube is right.
- 2, Our tubes are two-side-input design, pls connect the L and N to the two ends of the tubes respectively.

T5-LED Tube Integrated Series

CL1-LED Type: SMD3014, AC90-260V input, Beam:>120°, 2 years warranty, CE/ROHS Standard

Part No.	Length	Input Voltage	LED Type	LED Qty	Power	Average Output Lumens	Package		Price (USD/PCS)	
							Size(mm)	Weight	<2000	≥ 2000
LD-TL-T5-CL1-8W	60cm	AC90-260V	SMD3014	72	8W	680LM	1250x240x180 32pcs/ctn	16kgs/ctn	\$7.70	\$7.55
LD-TL-T5-CL1-12W	90cm	AC90-260V	SMD3014	110	12W	1020LM	950x240x180 16pcs/ctn	12kgs/ctn	\$10.50	\$10.30
LD-TL-T5-CL1-16W	120cm	AC90-260V	SMD3014	150	16W	1360LM	1250x240x180 16pcs/ctn	15kgs/ctn	\$12.00	\$11.80

CL3-LED Type: SMD2835, Beam:>150°, AC 220±20V input, 2 years warranty, CE/ROHS Standard— (roundness)

Part No.	Length	Input Voltage	LED Type	LED Qty	Power	Average Output Lumens	Package		Price (USD/PCS)	
							Size/CTN (mm)	Weight	<2000	≥ 2000
LD-TL-T5-CL3-8W	60cm	AC220±20V	SMD2835	100	8W	>600LM	820x265x255 20pcs/ctn	10kgs/ctn	\$8.90	\$8.10
LD-TL-T5-CL3-12W	90cm	AC220±20V	SMD2835	152	12W	>900LM	1420x215x165 20pcs/ctn	12kgs/ctn	\$11.50	\$10.60
LD-TL-T5-CL3-16W	120cm	AC220±20V	SMD2835	200	16W	>1380LM	1420x215x165 20pcs/ctn	15kgs/ctn	\$13.70	\$12.90
LD-TL-T5-CL3-20W	120cm	AC220±20V	SMD2835	240	20W	>1500LM	1420x215x165 20pcs/ctn	15kgs/ctn	\$14.90	\$13.90

Specifications:

- 1, LED source: Epistar SMD3528/3014
- 2, Dimmable available, Motion sensor available, Adjusting rotatable base available
- 3, Color Temperature: 2800~3200K, 5500~6500K, 6000~7000K, 4000K available
- 4, Efficiency: >90%, Rendering Index : >75
- 5, Beam Angle: >120°(Clear Cover)
- 6, Aluminum Housing Cover: Silver Aluminum body+Milky / Clear Cover
- 7, Life Span: 40,000~50,000 hours



Installation Guide:

- 1, Installation: Before installing, remove the ballast and starter, and make sure the circuit for T5 tube is right.
- 2, Our tubes are two-side-input design, pls connect the L and N to the two ends of the tubes respectively.