



# 3ELED CO.,LIMITED

**Contact: Mr Kent Zhang, Tel:+86(755)32846955 Fax: +86(755)-32846956**  
**Website: www.3elead.com, Skype: kenleds.export2 Email:kent@3elead.com**  
**ADD.:HongLianYing Industrial Park,Sili Rd.,GuanLan, 518110Shenzhen,P.R. C**

## Conventional LED Tube Light Pricelist — 3Yrs warranty



(Beam Angle 150°)



### 3Yrs warranty-T8 Tube light/Taiwan chip/PC cover Series-CE/RoHs Approved

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Package Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T801A2-9W	9W	600	>900	48	630*210*220mm 30pcs/ctn	AC85-265V	\$3.8
3ELD-TB09-T801A2-15W	15W	900	>1500	72	935*210*220mm 30pcs/ctn		\$5.0
3ELD-TB12-T801A2-18W	18W	1200	>1800	96	1240*210*220mm 30pcs/ctn		\$5.8
3ELD-TB15-T801A2-23W	23W	1500	>2300	120	1540*210*220mm 30pcs/ctn		\$7.4

#### Speciality:

- ★.The light source is utilized Taiwan NewCentury SMD2835 chip,higher lumens(milky cover>100lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★.Soft light good for eyes,no flicker.
- ★.Aviation Al with imported PC cover,good for heat emission,high lighting efficiency>90% ! PC cover will not be yellowish within 5years.
- ★.**3** Years warranty,Beam angle>150°,higher CRI,RA>80.
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K



## LED Full PC Tube pricelist — 3Yrs warranty



(Beam Angle 330°)



### 3Yrs warranty-T8 Tube light/Taiwan chip/PC cover Series-CE/RoHs Approved

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Package Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T802P1-9W	9W	600	>990	48	630*210*220mm 30pcs/ctn	AC85-265V	\$2.8
3ELD-TB09-T802P1-15W	15W	900	>1650	72	935*210*220mm 30pcs/ctn		\$3.2
3ELD-TB12-T802P1-18W	18W	1200	>1980	96	1240*210*220mm 30pcs/ctn		\$3.8
3ELD-TB15-T802P1-23W	23W	1500	>2430	120	1540*210*220mm 30pcs/ctn		\$5.2

#### Speciality:

- ★.The light source is utilized Taiwan NewCentury SMD2835 chip,higher lumens(milky cover>100lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★.Soft light good for eyes,no flicker.
- ★.Imported PC cover,good for heat emission,high lighting efficiency>90% ! PC cover will not be yellowish within 5years.
- ★.**3** Years warranty,Beam angle>330°,higher CRI,RA>80.
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K



## LED Glass Tube pricelist -- 3yrs warranty



(Beam Angle 330°)

3yrs warranty-T8 Tube light/ Taiwan chip/ Glass cover Series-CE/RoHs Approved

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T801G2-9W	9W	600	>990	48	630*210*220mm 30pcs/ctn	AC85-265V	\$3.6
3ELD-TB09-T801G2-15W	15W	900	>1650	72	935*210*220mm 30pcs/ctn		\$4.4
3ELD-TB12-T801G2-18W	18W	1200	>1980	96	1240*210*220mm 30pcs/ctn		\$5.2
3ELD-TB15-T801G2-23W	23W	1500	>2430	120	1540*210*220mm 30pcs/ctn		\$6.6


### Speciality:

- ★.The light source is utilized Taiwan NewCenturySMD2835 chip,higher lumens(milky cover>110lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★ **Full glass cover**,higher light transmittance, lighting efficiency>90% ! Super large beam angle>330°:perfect insulation,application more safety! **Glass cover will never be yellowish,the light transmittance of glass cover is 20% higher than PC cover.**
- ★. Soft light good for eyes,no flicker.
- ★. **3**Years warranty,Higher CRI, RA>80
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K
- ★. Double foam protection,safety for transportation !

Glass cover  
120lm/W,RA>85  
330°Beam angle



### Length



## T8 LED Integrated Tube pricelist -- 3yrs warranty



(Beam Angle 150°)

3yrs warranty-T8 Tube light/Taiwan chip/PC cover Series-CE/RoHs Approved

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Package Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T801Y01-9W	9W	600	>900	48	630*210*220mm 25pcs/ctn	AC85-265V	\$4.6
3ELD-TB09-T801Y01-15W	15W	900	>1500	72	935*210*220mm 25pcs/ctn		\$6.2
3ELD-TB12-T801Y01-18W	18W	1200	>1800	96	1240*210*220mm 25pcs/ctn		\$7.2
3ELD-TB15-T801Y01-23W	23W	1500	>2300	120	1540*210*220mm 25pcs/ctn		\$9.4

### Speciality:

- ★.The light source is utilized Taiwan NewCentury SMD2835 chip,higher lumens(milky cover>100lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★.Soft light good for eyes,no flicker.
- ★.Aviation Al with imported PC cover,good for heat emission,high lighting efficiency>90% ! PC cover will not be yellowish within 5years.
- ★. **3**Years warranty, Beam angle>150°, higher CRI, RA>80
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K



PC cover  
over 20000pcs sold




# 3ELED CO.,LIMITED

Contact: Mr Kent Zhang, Tel:+86(755)32846955 Fax: +86(755)-32846956

Website: www.3elead.com, Skype: kenleds.export2 Email:kent@3elead.com

ADD.:HongLianYing Industrial Park,Sili Rd.,GuanLan,LongGang,518110Shenzhen,P.R. C

## T5 integrated LED Tube pricelist — 3Yrs warranty



T5 Tube light SMD2835 Series-CE/RoHs Approved

(Beam Angle 150°)


Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T501-9W	9W	600	>900	48pcs	630*210*220mm 30pcs/ctn	AC85-265V	\$4.0
3ELD-TB09-T501-15W	15W	900	>1500	72pcs	935*210*220mm 30pcs/ctn		\$5.4
3ELD-TB12-T501-18W	18W	1200	>1800	96pcs	1240*210*220mm 30pcs/ctn		\$6.4
3ELD-TB15-T501-23W	23W	1200	>2300	120pcs	1540*210*220mm 30pcs/ctn		\$8.6

### Speciality:

- ★.The light source is utilized **Taiwan NewCentury SMD2835 chip**,high lumens(**milky cover>100lm/w**),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,better protection.
- ★.Soft light good for eyes,no flicker.
- ★.Aviation Al with imported PC cover,good for heat emission,high lighting efficiency>90%, PC cover will not be yellowish within 5years.
- ★.**3**Years warranty,Beam angle>120°(clear cover),150°(milky cover),**RA>80**.
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,5700-7000K
- ★.



Single Connection:

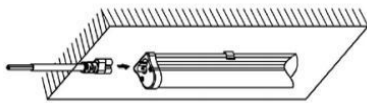

Multiple Connection(Max connections 10pcs per time):



## Functional LED Tube Light Pricelist — 3Yrs warranty




T8 Tube light with Radar control & PIR sensor control-CE/RoHs approved

(Beam Angle 150°)

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T8RS-9W	9W	600	>900	48pcs	630*210*220mm 30pcs/ctn	AC85-265V	\$7.6
3ELD-TB09-TRS-15W	15W	900	>1500lm	72pcs	935*210*220mm 30pcs/ctn		\$8.6
3ELD-TB12-T8RS-18W	18W	1200	>1800lm	96pcs	1240*210*220mm 30pcs/ctn		\$9.8
3ELD-TB15-T8RS-20W	20W	1500	>2000lm	120pcs	1540*210*220mm 30pcs/ctn		\$12.5

### Speciality:

- ★.The light source is utilized **Taiwan NewCentury SMD2835 chip**,high lumens(**milky cover>100lm/w**),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Mirowave control or infrared control for your option, very sensitive.
- Induction range: **for raddar control,180°,within 10meter; for infrared control,120°,within 5meter.**
- When there's no moving object,the tube will be work on standby mode automatically at very low power.
- ★.Using flicker-free LED driver,high power factor,better protection,more safety.
- ★.Aviation Al with imported PC cover,good for heat emission,high lighting efficiency>90%,**PF>0.95**
- PC cover will not be yellowish within 5years.
- ★.Soft light good for eyes,no flicker.
- ★.**3**Years warranty,Beam angle>120°(Clear cover),150°(Milky cover),**RA>80**.
- ★.T.color: Warm white,2800-3200K;Pure white,6000-6500K

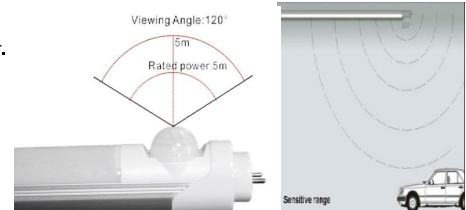




# 3ELED CO.,LIMITED

Contact: Mr Kent Zhang, Tel:+86(755)32846955 Fax: +86(755)-32846956  
 Website: www.3elead.com, Skype: kenleds.export2 Email:kent@3elead.com  
 ADD.:HongLianYing Industrial Park,Sili Rd.,GuanLan, 518110Shenzhen,P.R.C

## LED Tube price-list

### Conventional LED Tube Light Pricelist -- 5yrs warranty (Beam Angle 150°)



5yrs warranty-T8 Tube light/Taiwan Edison chip/PC cover Series-EMC/LVD/RoHs Approved

Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Package Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T801A1-9W	9W	600	>990	48	630*210*220mm 30pcs/ctn	AC85-265V	\$6.60
3ELD-TB09-T801A1-15W	15W	900	>1650	72	935*210*220mm 30pcs/ctn		\$8.30
3ELD-TB12-T801A1-18W	18W	1200	>1980	96	1240*210*220mm 30pcs/ctn		\$9.60
3ELD-TB15-T801A1-23W	23W	1500	>2530	120	1540*210*220mm 30pcs/ctn		\$11.80

**Speciality:**

- ★.The light source is utilized Taiwan Edison SMD2835 chip,higher lumens(milky cover>110lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★.Soft light good for eyes,no flicker.
- ★.Aviation Al with imported PC cover,good for heat emission,high lighting efficiency>90% ! PC cover will not be yellowish within 5years.
- ★. **5** Years warranty,Beam angle>150°,higher CRI,RA>80
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K



### LED Glass Tube pricelist -- 5yrs warranty (Beam Angle 330°)



5yrs warranty-T8 Tube light/ Taiwan Edison chip/ Glass cover Series-EMC/LVD/RoHs Approved


Model	Power	Length(mm)	Lumens(Lm)	LED Qty(pc)	Size(mm)	Input Voltage	Ex-work price/USD (MOQ:1carton)
3ELD-TB06-T801G1-9W	9W	600	>1080	48	630*210*220mm 30pcs/ctn	AC85-265V	\$5.70
3ELD-TB09-T801G1-15W	15W	900	>1800	72	935*210*220mm 30pcs/ctn		\$6.60
3ELD-TB12-T801G1-18W	18W	1200	>2160	96	1240*210*220mm 30pcs/ctn		\$7.80
3ELD-TB15-T801G1-20W	20W	1500	>2400	120	1540*210*220mm 30pcs/ctn		\$8.80

**Speciality:**

- ★.The light source is utilized Taiwan Edison SMD2835 chip,higher lumens(milky cover>120lm/w),low power consumption and low decay,life time can reach to 50000hrs.
- ★.Using flicker-free LED driver,high power factor,**PF>0.95**,better protection.
- ★. **Full glass cover**, higher light transmittance, lighting efficiency>90% ! Super large beam angle>330°;perfect insulation,application more safety! **Glass cover will never be yellowish,the light transmittance of glass cover is 20% higher than PC cover.**
- ★. Soft light good for eyes,no flicker.
- ★. **5** Years warranty,Higher CRI,RA>80
- ★.T.color: Warm white,2700-3500K;Pure white,4000-5000K;Cold white,6000-7000K
- ★. Double foam protection,safety for transportation !



**Length**




## Installation Guide:

### Tube Install Instruction

#### ● WIRE DRAWING

##### Wire drawing 1:

Connect to the power directly




Install LED tube



**Warning1:** Prohibition to install LED tube before removing starter and ballast, it will result in damage of LED tube.

##### Wire drawing 2:

Removing starter and ballast




Install LED tube



**Warning1:** Prohibition to install LED tube before removing starter and ballast, it will result in damage of LED tube.

⚠ **Warning :** All operation must be done by certificated electrician

## Packing:



Strong paper tube



Strong paper tube



Firm package

Remark: for glass tube, there have a milky tube of high thermal conductivity and light transmission material, which makes the glass much stronger, safer for transportation.

## Attention:

	<p>① As rated voltage, any operation under high or low voltage for long time will cause life shortage</p>		<p>④ LED Tube cannot be used in those occasions asking for dimmer</p>	<p>⑦ when abnormally, please check if well connection between lamp holder and base; the power voltage is correct or not. If all condition is normal and problems are not solved, Please replace LED Lights with A new one;</p>
	<p>② LED lights is not allowed to be installed in flammable object and covered by insulation blanket</p>		<p>⑤ LED Tube cannot be seen directly by optical instrument Degree is 1M</p>	
	<p>③ Before installation and replacement of fluorescent tube, power must be cut off to keep safe</p>		<p>⑥ Outdoor is prohibited or in any place where rain drops</p>	